



Double Master Plus Combine

*For more information see your local
authorized Pickett Equipment dealer*

www.pickettequipment.com
1-800-473-3559

Gentle central flow threshing cylinder



Double Master Plus Combine

Standard Features:

- *Adjustable Tongue Height
- *Heavy duty drive train equipped with:
 - *Cam type cut-out clutch
 - *Over running clutch
 - *Wide-angle CV joint
- *In cab Touch Screen shaft monitor system
- *Touch Screen Monitor also controls pickup head On/Off switch and speed control
- *North American compatible JIC hydraulic fittings
- *1000 PTO input, 2 speed transmission:
 - *540 & 390 output
 - *Optional 500 & 350 output
- *84" 8 tube, soft fingered pick up head
- *Threshing Capacity -- 7 to 10 acres per hour
- *Bin capacity -- approximately 8,800 lbs
- *Two stage dump bin
- *Dump Bin includes leveling auger
- *27½" diameter concave with 20 mm holes
- *31 adjustable, hardened threshing pins in central flow cylinder
- *Large capacity nylon cup elevator leg
- *Rear hydraulic drive elevator leg, shaker pan & cross auger
- *Two-stage vacuum cleaning system
- *Rear or side straw discharge
- *18.4 x 30 tires 10 ply
- *84" Star Feeder Housing
- *84" Feeder Auger
- *Cross auger feed to elevator leg



At Pickett Equipment
Seed Quality is our
1 Goal



For more information see your local
authorized Pickett Equipment dealer

www.pickettequipment.com
1-800-473-3559



AgCam Monitoring System



Power accessories not shown

KIT INCLUDES:


- 7" Monitor
- Monitor Remote
- A/V Adaptor
- Camera
- A/C Power Adapt
- 12v/Hardwire Power Adapt
- 60' Cable
- 20' Cable

Camera Features

- ◆ Built-in, high quality 1/3" CCD Camera
- ◆ Standard lens features 92 deg. field of view (3.6mm).
- ◆ Built-in CDS light-source sensor can automatically turn on/off built in IR by detecting the light source
- ◆ Waterproof, Shockproof. Suitable for nearly any use
- ◆ Photochromic camera body lens darkens in bright conditions and becomes transparent under low light
- ◆ 540TV lines Horizontal Resolution
- ◆ Operating Temp -45F - 150F (-42C - 66C)
- ◆ 3 Year Warranty
- ◆ IP Rating of 68/69. equals a completely waterproof camera. Not watertight, waterproof
- ◆ Solid billited aluminum camera housing
- ◆ Built in the USA

Monitor Features

- ◆ 7" Monitor features TFT LCD Active Matrix technology; allowing for a larger degree of view from a greater angle
- ◆ Remote control
- ◆ Functions include adjustable color, brightness, volume and contrast
- ◆ Selectable Audio Video inputs. (All monitors equipped with two (2) A/V inputs)
- ◆ Operating Temperature of 23F - 140F
- ◆ Storage Temperature of -4F - 170F
- ◆ Viewing angle: L/R: 80 Top: 30 Down: 10
- ◆ 2 Year Warranty
- ◆ Resolution: 960(H)x234(V)=224x640 dots

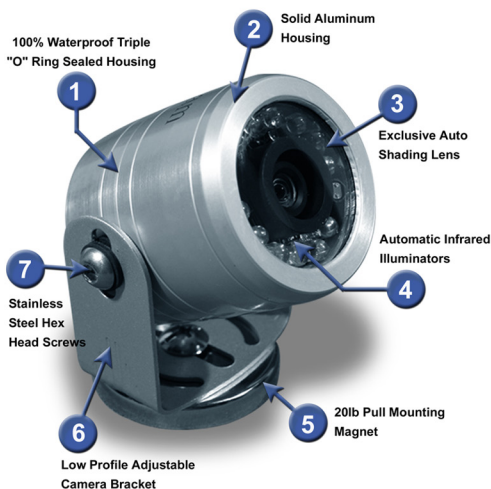

For more information see your local
authorized Pickett Equipment dealer

www.pickettequipment.com
1-800-473-3559