




*For more information see your local  
authorized Pickett Equipment dealer*

## Floating Combine Pickup

[www.pickettequipment.com](http://www.pickettequipment.com)  
1-800-473-3559




**Pickett Floating Combine Pickups** can and have been installed on all types and brands of combines. Floating heads can be manufactured in a wide variety of widths to meet every need (5 to 30 feet). Hydraulic drive motor is operated by the combine's hydraulic system and controls gives the operator control of the pickup speed at his fingers. 8-bar finger system allows for gentle smooth flow into your combine.



# Floating Combine Pickup

- Rotor with follow cam operated fingers
- 8 finger tube rotor
- Rubber mounted fingers
- Optional soft rubber fingers for rocky conditions
- Hydraulic drive motor
- 18 x 9.5 - 8 gauge wheels
- Right or left hand end drive (specify)
- Two slinger tubes: (round and hex)
- Rotor rods
- Hold down rods for windy conditions

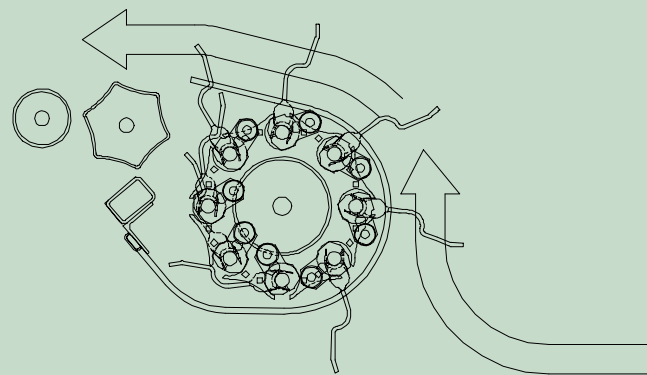

Driven by the exclusive follow cam design, 8 rows of fingers retract from the material allowing smooth gentle movement into the combine



*For more information see your local authorized Pickett Equipment dealer*

[www.pickettequipment.com](http://www.pickettequipment.com)  
1-800-473-3559



## Models Available

	Minimum Header size	Approx. Weight
124" Combine Pickup	12'	1265 lb.
148" Combine Pickup	14'	1502 lb.
172" Combine Pickup	16'	1735 lb.
222" Combine Pickup	20'	2230 lb.
246" Combine Pickup	22'	2480 lb.
282" Combine Pickup	25'	3175 lb.
342" Combine Pickup	30'	3750 lb.

